







D-25-1

Lewis Cove

Perry, ME



Date printed: 9/11/2022 6:49 AM

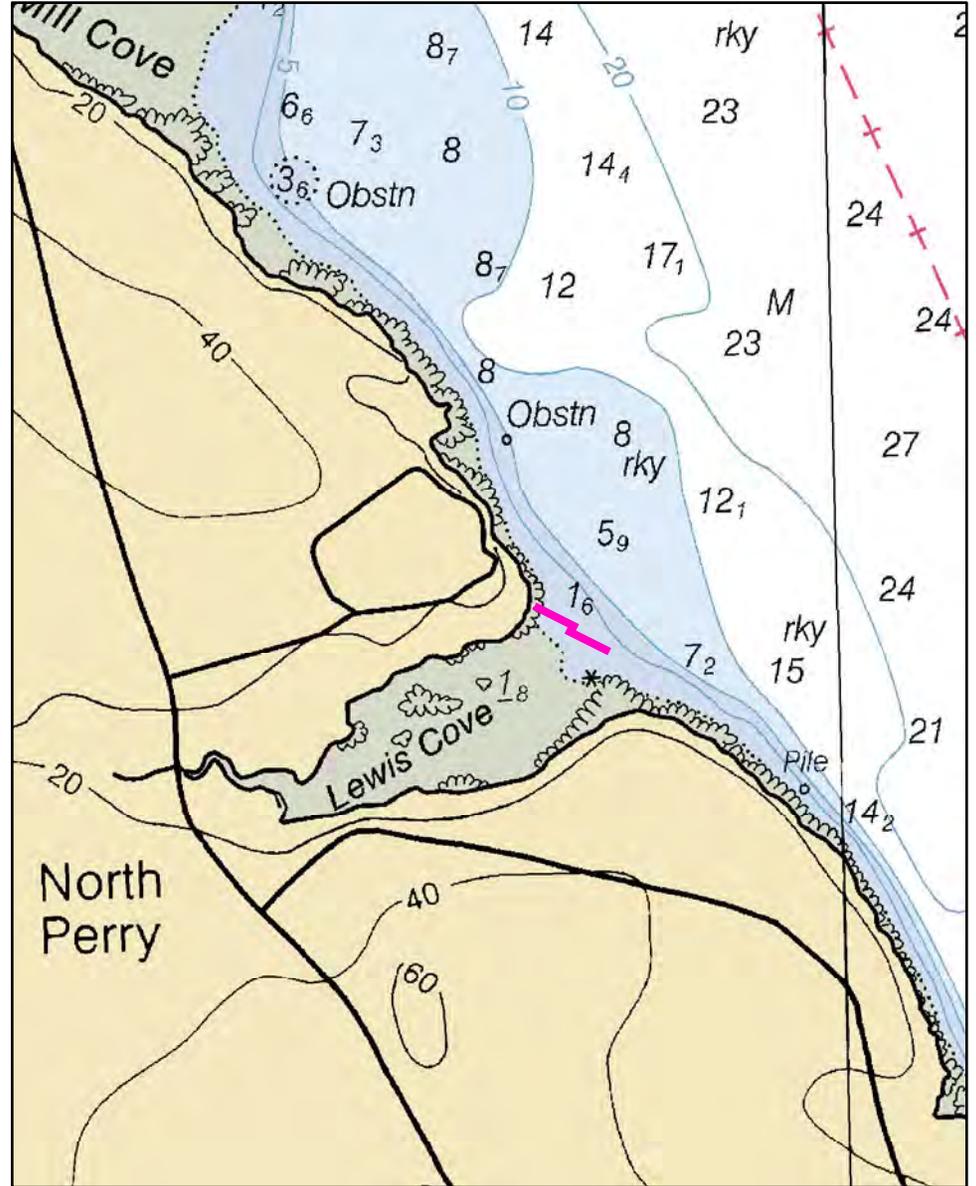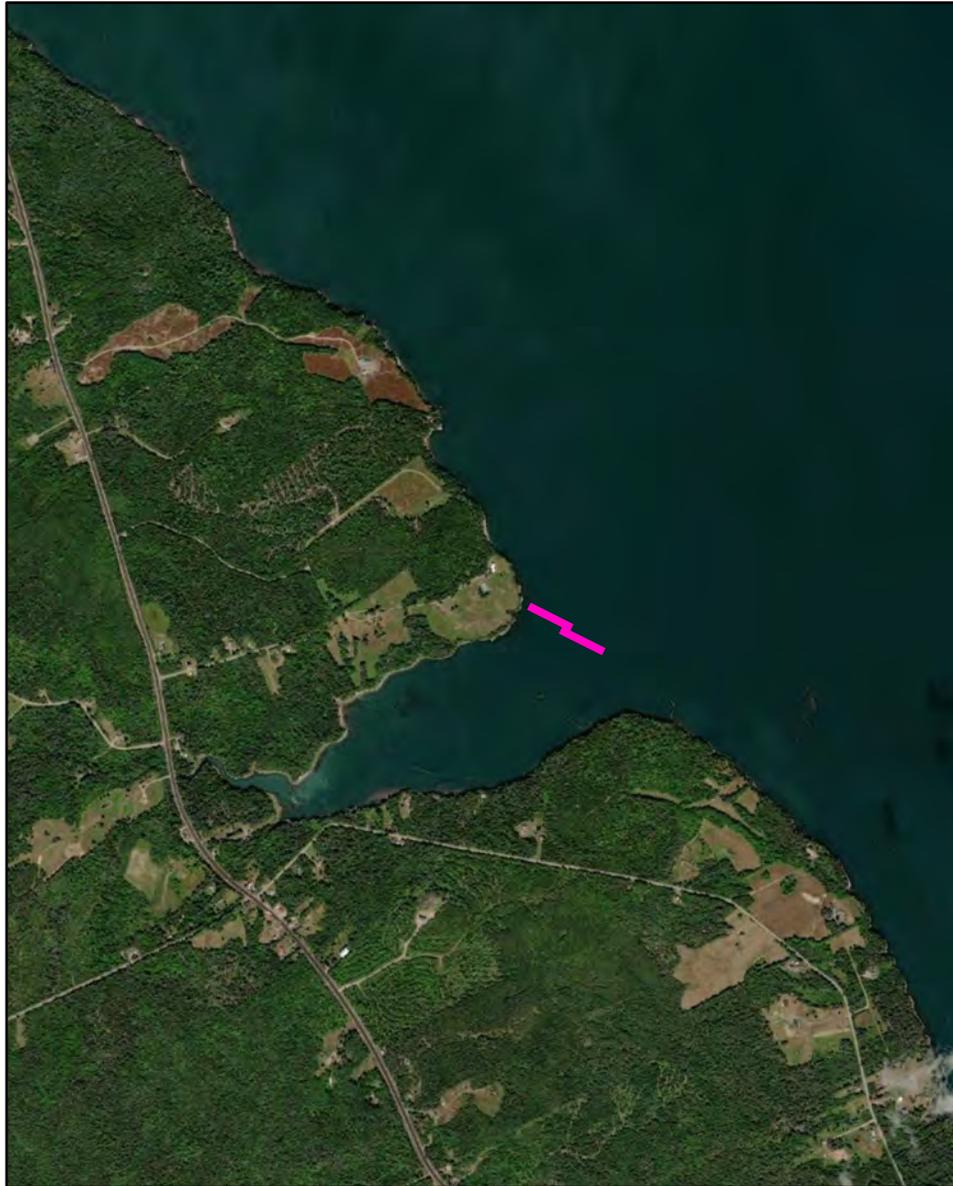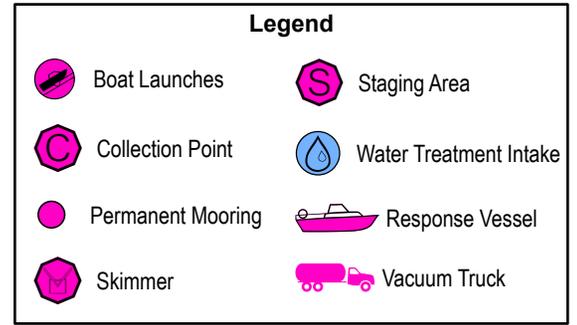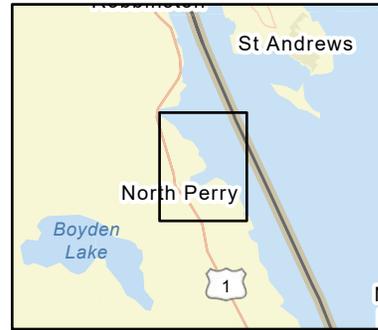

Maxar, Province of New Brunswick, Esri Canada, Esri, HERE, Garmin, SafeGraph, METI/NASA, USGS, EPA, NPS, USDA, NRCan, Parks Canada, NOAA

D-25-1 Lewis Cove

Town Perry

Port Region Downeast

Latitude 45° 2.267' N **Longitude** 67° 5.582' W

NOAA Chart # 13398_1

Approx. Tidal Range (feet) 19

ESI Map # 3A

Max Current (knots) Flood Ebb

EVI Map # 97

Source **DeLorme Map # (2019)** 37 D2

Resources At Risk

ESI Primary Shoreline Type Mixed sand and gravel beaches (5)

ESI Secondary Shoreline Type

Environmental Concerns Shorebirds, shellfish and herring weirs in area

Archaeological Conflicts None noted. Contact MHPC at (207) 287-2132 if archaeological items are discovered.

Strategy Information

Strategy Purpose To deflect oil from Lewis Cove

Staging Areas St. Croix River boat launch, Route 1 in Robbinston

Site Access St. Croix River boat launch, Route 1 in Robbinston

Nearest Boat Ramp St. Croix River boat launch, Route 1 in Robbinston (2.5 miles north)

Collection Points N/A. Deflection strategy

Special Instructions

Work Assignment Deploy two 500 foot sections of boom as shown to deflect oil on an incoming tide. Reverse for oil originating downriver.

Recommended Equipment / Resources

Length of Boom (feet) 1000 **Type of Boom** 12" to 18" containment boom

Recommended Equipment (Minimum)
4 - anchor systems: 35 lb. Danforth or equivalent and line for 3:1 scope plus tag lines and buoys.
1 - shoreside connection or additional anchor
2 - workboats with minimum 90 hp
2 - boat operators
4 - laborers

Unless otherwise indicated, the boom length given is the distance measured on the chart. Actual length required may vary with conditions.

Last Desktop Validation: 5/4/2019

Last Field Visit: 6/13/2007

Last Field Test: