

Tactics Legend


- DF** Deflection Booming
- DV** Diversion Booming
- EX** Exclusion Booming
- FO** Free Oil Recovery
- PR** Passive Recovery
- SR** Shoreside Recovery
- S** Staging Area
-  Boat Ramp
-  Kayak Ramp
-  Railroad
-  Protected-Water Boom
-  Snare/ Sorbent Boom

Equipment - All Tactics

Boom(ft)	4000
Marine anchors	19
Shore anchors	5
Sorbent Boom(ft)	0
FO Recovery Sys	0
Shore Responders	4
Boat Responders	2
Boats	2

Version

11/22/2021

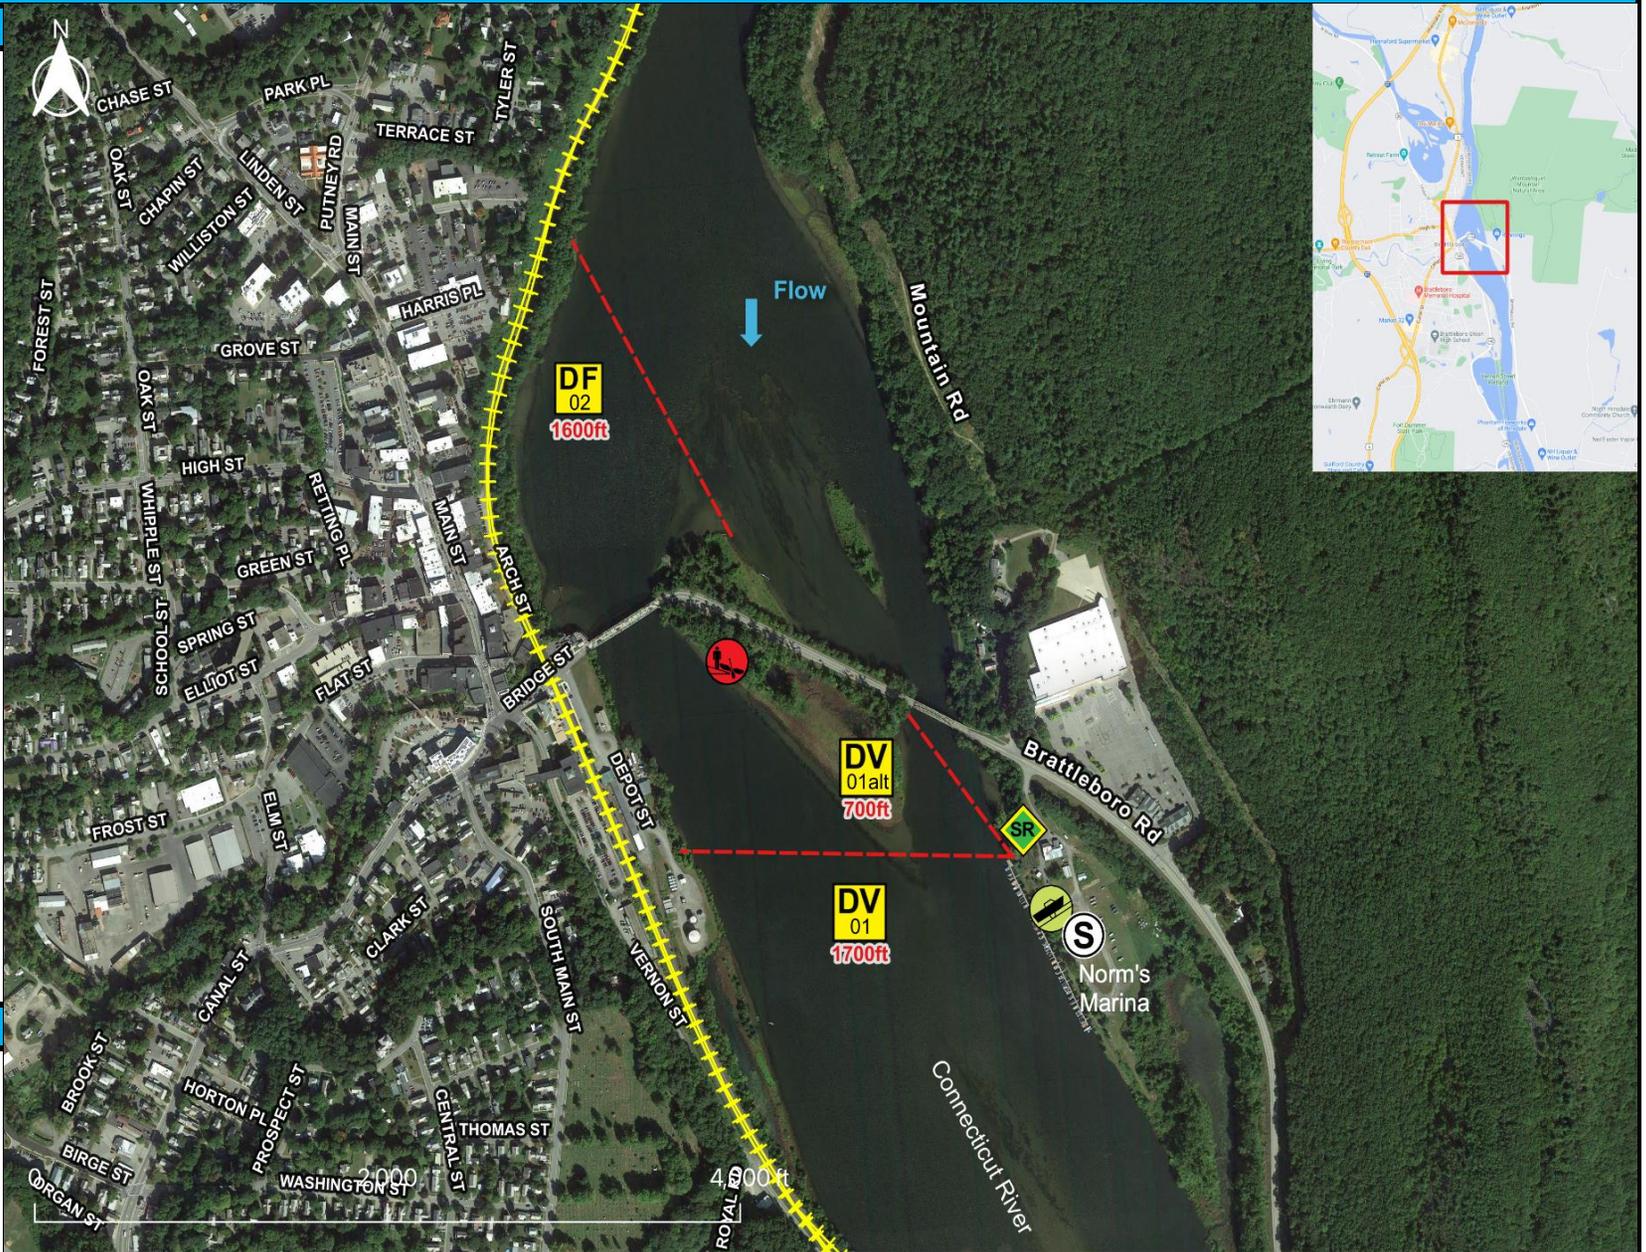

Tactics Deployment, Responder Safety, and GRS Data Information

Always consider on-scene conditions before deploying GRS tactics. Responder safety should always be the first priority.

Location

Latitude: 42° 51' 6"
 Longitude: 72° 33' 8"
 State: New Hampshire-Vermont

Tactic #	Purpose	Response Equipment	Deployment Resources	Deployment Notes
DV-01 	Redirect spilled oil from one location or direction of travel to a specific site for recovery.	1700 ft protected water boom 8 marine anchor system 4 shoreline anchor system	4 shore responders 2 response boats 2 boat operators	Tend through tidal changes. Deploy boom as depicted to divert incoming oil to the collection site. Anchor every 200-300'. Adjust angle as necessary to reduce entrainment. Set up shoreside recovery and tend throughout tide. Deploy shoreside anchor first.
		Testing Date	N Tested	
SR-01alt 	Remove spilled oil that has been diverted to a designated recovery site accessible from shore	1 skimming system 1 storage tank or bladder 1 hoses, pumps, fittings	2 shore responders	Set up shoreside recovery tactic at general location depicted on map. Some access points located at private residences. Access may be difficult.
		N/A	Testing Date	
DV-01alt 	Redirect spilled oil from one location or direction of travel to a specific site for recovery.	700 ft protected water boom 3 marine anchor system 4 shoreline anchor system	2 shore responders 1 response boats 1 boat operators	Tend through tidal changes. Deploy boom as depicted to divert incoming oil to the collection site. Anchor every 200-300'. Adjust angle as necessary to reduce entrainment. Set up shoreside recovery and tend throughout tide. Deploy shoreside anchor first.
		Testing Date	N Tested	
DF-02 	Direct spilled oil away from a location to be protected or to change the course of the slick.	1600 ft protected water boom 8 marine anchor system 2 shoreline anchor system	4 shore responders 2 response boats 2 boat operators	Tend through tidal changes. Deploy boom as depicted to deflect incoming oil away from sensitive areas. Anchor every 200-300'. Deploy shoreside anchor first.
		Testing Date	N Tested	

Local contacts

All Fire Departments	911
NH DES (Oil Spill)	603-271-3899 (day)
NH DES (After Hours/Weekends) via NH State Police	603-223-4381
NH DES Drinking Wtr Bureau	603-271-2513 (day)
NH Fish & Game	603-271-3361
NH Div. of Historical Resources	603-271-3483
NH Dept. of Safety/Homeland Security & Emergency Management	800-852-3792
VT Comm. on Native American Affairs	802-779-7015
VT DEC Spill Reporting (24-Hour)	800-641-5005
VT DEC Spill Reporting (day)	802-828-1138
VT Drinking Water & Groundwater	1-802-741-5311
VT Emergency Mgmt & Homeland Security	800-347-0488
VT Fish & Wildlife Dept (HQ)	802-828-1000
VT Hazmat Response Team	1-800-641-5005
VT Div of Historical Preservation	802-272-2509
EPA Region 1 Tribal Program	617-918-1123
National Response Center	800-424-8802
Great River Hydro LLC	802-291-8104
Connecticut River Conservancy	413-772-2020



Looking upriver/north at shoreside recovery point for DV-01a (right) and DV-01b (left) (June 2021)



Norm's Marina boat ramp looking west toward Brattleboro. Note above ground storage tanks on opposite shore (June 2021)

Resources Protected

Fish	
Birds	
Threat/End. Species	General, Endangered/Threatened Plants
Cultural/Historical Resources	Connecticut River shorelines are highly archaeologically sensitive. Contact/consult the VT Div. for Historic Preservation prior to any response activities.
Human Use	Boat Ramp, Critical Infrastructure, Rail Line
Land Management	Conservation Areas/Lands
Riverine	

Navigational Hazards

Special Considerations

Shoreline locations adjacent to deflection and diversion boom previously disturbed. Moderate to low potential for submerged archaeological sites. Limit bottom disturbance. River conditions, including flow rate and flood stage, vary depending on time of year and heavy rain and/or snowfall. Survey site prior to deployment and modify deployment strategy as appropriate. If ice is present, reevaluate strategy.